


Spec Data Sheet OI-200

**ACOUSTICAL  
CEILING  
TILES**

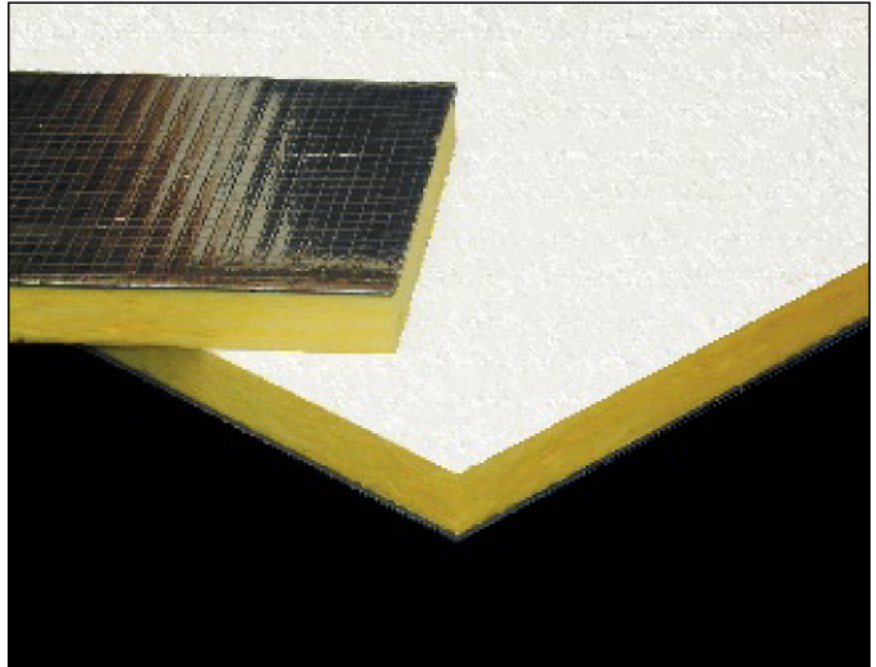

**OELER** OI-200 Ceiling Tiles have a white nubby cloth facing. OI-200 Ceiling Tiles are available in 1" or 2" thickness with standard sizes to fit a 2' x 2' or 2' x 4' lay in ceiling tile grid.

OI-200B Ceiling Tiles have a 1# psf foil backed barrier for high STC and NRC requirements. OI-100B Ceiling Tiles are available in a 1-1/8" or a 2-1/8" thickness with standard sizes to fit a 2' x 2' or 2' x 4' lay in ceiling tile grid.

**Substrate:**

6-7# PCF rigid fiberglass core.

**Mounting:**

Grid supplied by others

**Finishes:**

White nubby cloth facing

**Weights:**

C-200B  
2' x 2'-6 lbs/ea  
2' x 4'-12 lbs/ea

**Acoustical:**

NRC Rating  
1" .....0.85  
2" .....1.15

STC rating (C-200B)  
STC-26 (single pass)

**Edge Detail:**

Square

**Fire Rating:**

All components shall have a  
Class A fire rating per ASTM E-84

