



SPEC DATA SHEET # ACT-100

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

ACT-100


ACOUSTICAL CEILING TILES

Our acoustical ceiling tile products are designed to acoustically treat and soundproof interior ceiling spaces within. The SoundQuality C-Series Ceiling Tiles by Sound Seal offer both excellent acoustics with customized options to enhance the visual aesthetics.

Sound Quality Ceiling tiles are offered as both a sound absorbing as well as combination sound absorbing / sound blocking tile.

C-100 Ceiling Tiles have a 2-mil white pebble grain vinyl facing attached to a 1" or 2" thick rigid fiberglass board and have excellent sound absorption (NRC) ratings.

C-100B Ceiling Tiles take the standard C-100 tile and add a 1# per square foot foil backed vinyl noise to the backside of the tile for high sound absorption (NRC) and high sound blocking (STC) requirements.

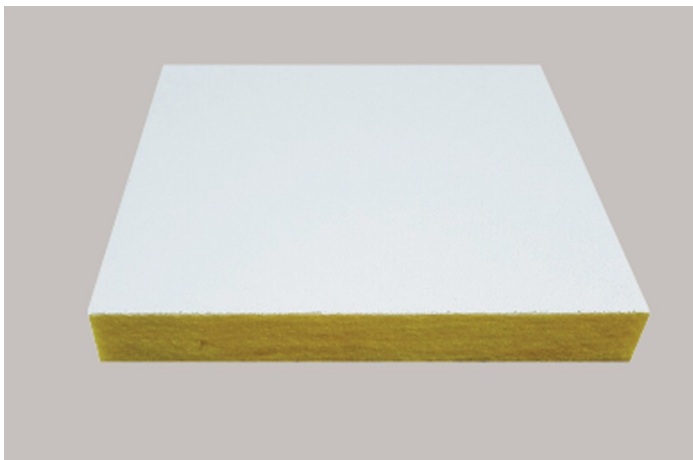

FEATURES:

- Standard size 2'x2' or 2'x4'
- Custom sizes available
- 1" or 2" thickness
- 2 mil white pebble grain finish
- Excellent acoustical values
- Offered with a vinyl noise barrier for high STC requirements





Intelligent Acoustic Solutions

SPEC DATA SHEET # ACT-100



FINISH

2 mil white pebble grain vinyl

ACOUSTICAL

NRC Rating

1" Thick ----- .85

2" Thick -----1.15

OX-ACTB Version----- STC 26

SUBSTRATE

6-7# PCF rigid fiberglass core

*OX-ACTB adds a vinyl noise barrier

EDGE DETAIL

Square

WEIGHTS

OX-ACT Tile .6 lbs/SqFt

OX-ACTB Tile 1.6 lbs/SqFt

MOUNTING OPTIONS

Grid supplied by others

SPECIFICATIONS:

Specifications can be downloaded from our website
www.oeler.com/specs.html or call us at (412) 884-3000.