



## SPEC DATA SHEET # OX-250

4700 Clairton Blvd., Pittsburgh, PA 15236  
Tel: (412) 884-3000 • Fax: (412) 884-3300  
www.oeler.com • sales@oeler.com


# OX-250

## NOISE BARRIER WALL PANELS

Oelex Acoustical Wall Panels by Oeler Industries, Inc. are the solution for areas that require noise reduction and are available in a variety of models for various applications. The OX-250 Wall Panel is manufactured specifically as a noise barrier/absorber panel that offers both superior absorption and noise blocking performance. Application for the OX-250 panels includes corporate offices, conference rooms, doctor's offices, waiting rooms, classrooms and any area where speech privacy is a concern.

The OX-250 Noise Barrier Wall Panels are the solution to speech privacy problems, providing clients the confidence that confidential conversations will not be overheard. The OX-250 Panels are constructed using 2 layers of a 6-7# PCF rigid fiberglass core between a 1lb per square foot non-reinforced loaded vinyl noise barrier. Panels are available in 1 1/8" and 2 1/8" thickness, with a maximum size up to 4'x10' and may be finished in custom, designer or C.O.M. fabric.

OX-250 Panels can be installed with impaling clips, top hook and construction adhesive. Due to panel weight 2.5lb per square foot, panels must be installed from floor to ceiling. Floor molding can be re-installed after installation of OX-250 panels.

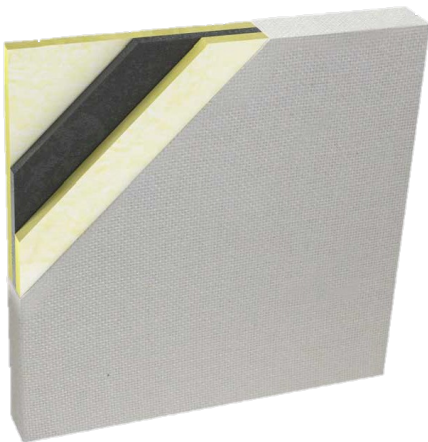

### FEATURES:

- High NRC and STC ratings
- Class A fire rated
- Standard or designer or C.O.M fabrics





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-250



**FINISHES:**

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Carnegie and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

**ACOUSTICAL DATA:**

**NRC Rating**

1 1/8"	0.8 - 0.9
2 1/8"	0.9 - 1.0

**STC Rating**

1 1/8"	29 est.
2 1/8"	30 est.

**SPECIFICATIONS:**

Specifications can be downloaded from our website <https://www.oeler.com/resources/datasheets/> or call us at (412) 884-3000.

**MOUNTING OPTIONS:**



2-PART  
MECHANICAL CLIPS



CLIP & VELCRO



IMPALING CLIP

**ADDITIONAL DETAILS:**

Available in a variety of edges as well as high-impact or reflective options.