



SPEC DATA SHEET # OX-310

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com


OX-310

TACKABLE WALL PANELS

Oelex Acoustical Wall Panels by Oeler Industries, Inc. are the solution for areas that require noise reduction and are available in a variety of models for various applications. The OX-310 Wall Panel is manufactured specifically as a tack panel and offers minimal sound absorption. Application for the OX-310 panels includes conference rooms, classrooms, offices, and any area where low absorption and high tackability is required.

The OX-310 panel is constructed with a 24# PCF mineral fiber core. Edges are fully wrapped in standard, custom or C.O.M. fabric with the option of square or bevel edge detail. Panels are available in 1/2" or 3/4" thick with standard or custom sizes up to a maximum of 4' x 8'.

OX-310 panels are easily installed with nails & construction adhesive, mechanical clips or hoop & loop.

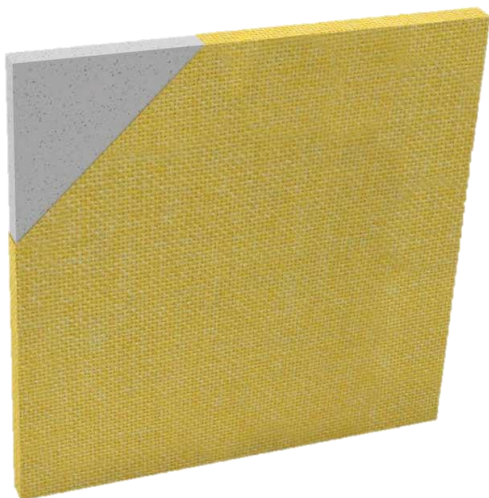

FEATURES:

- High trackability
- Class A fire rated
- Standard, designer or C.O.M. fabric





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-310



FINISHES:

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maraham, Carnegie and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

**ACOUSTICAL DATA:
NRC Rating**

1/2":	.20
3/4" (perforated):	.60

SPECIFICATIONS:

Specifications can be downloaded from our website <https://www.oeler.com/resources/datasheets/> or call us at (412) 884-3000.

MOUNTING OPTIONS:



2-PART
MECHANICAL CLIPS



CLIP & VELCRO



IMPALING CLIP

ADDITIONAL DETAILS:

Available in a variety of edges as well as high-impact or reflective options.