



## SPEC DATA SHEET # OX-B10 Series

4700 Clairton Blvd., Pittsburgh, PA 15236  
Tel: (412) 884-3000 • Fax: (412) 884-3300  
www.oeler.com • sales@oeler.com

# OX-B10 NR Noise Barrier

## Mass-loaded Vinyl

The Oelex B-10 NR by Oeler Industries, Inc. is a flexible non-reinforced mass-loaded vinyl barrier that is designed to reduce the transmission of noise through walls, ceilings, and floors. Also used as a noise barrier component in acoustical composites.

### Applications:

Typically used as a noise barrier in gypsum wallboard and stud construction to substantially improve transmission loss between rooms. Also, utilized as a barrier septum material in acoustical curtain construction to form BSC style composites.



### FEATURES:


- Rolls are available 54" wide up to 60' long
- Limp, flexible, formable, versatile
- High tear and tensile strength
- Extremely easy to install





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-B10 NR

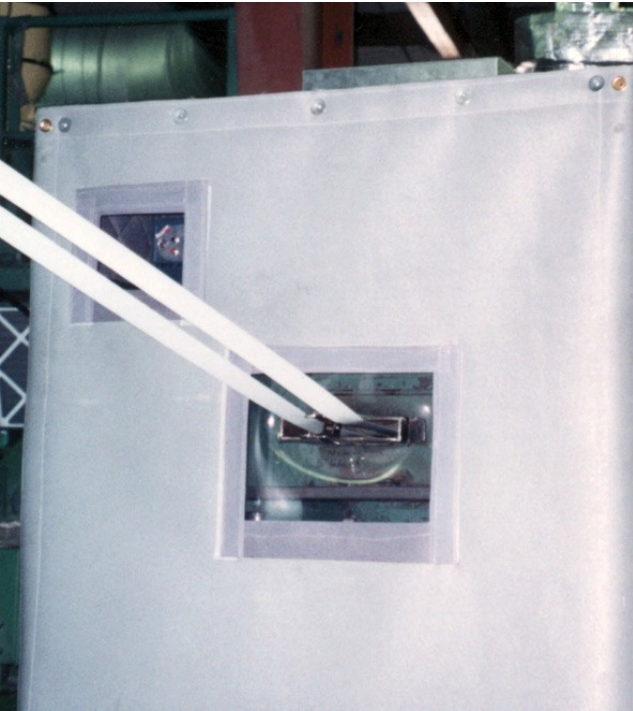

PRODUCT DATA:

<b>Description</b>	1 lb-psf non-reinforced loaded vinyl barrier
<b>Nominal thickness</b>	0.10 inches
<b>Standard width</b>	54" wide
<b>Roll length</b>	30' or 60' long
<b>Weight</b>	1.0 lb psf
<b>Tensile (PSI)</b>	220
<b>Elongation</b>	140%
<b>Service Temperature</b>	-20° F to +180°

ACOUSTICAL DATA:

Product	Sound Transmission Loss (dB)						STC
	125	250	500	1000	2000	4000	
OX-B10 NR	13	17	22	26	32	37	26

ASTM E-90 & E 413