



SPEC DATA SHEET # OX-B20NR

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

OX-B20NR Noise Barrier

Mass-loaded Vinyl

Oelex B-20 NR by Oeler Industries, Inc. is a flexible non-reinforced mass-loaded vinyl noise barrier that is designed to reduce the transmission of noise through walls, ceilings, and floors. OX-B20NR is a two-pound per sq. ft. material specifically designed to offer greater noise attenuation than standard one-pound per sq. ft. products, primarily at low frequencies.

Applications:

Typical uses include as a noise barrier in drywall and stud construction to substantially improve transmission loss between rooms. Also, utilized as a barrier septum material in acoustical curtains and foam composites.



FEATURES:




- Rolls are available 54" wide x 30' long
- Easy to install
- Limp, flexible, formable, versatile
- High tear and tensile strength





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-B20NR

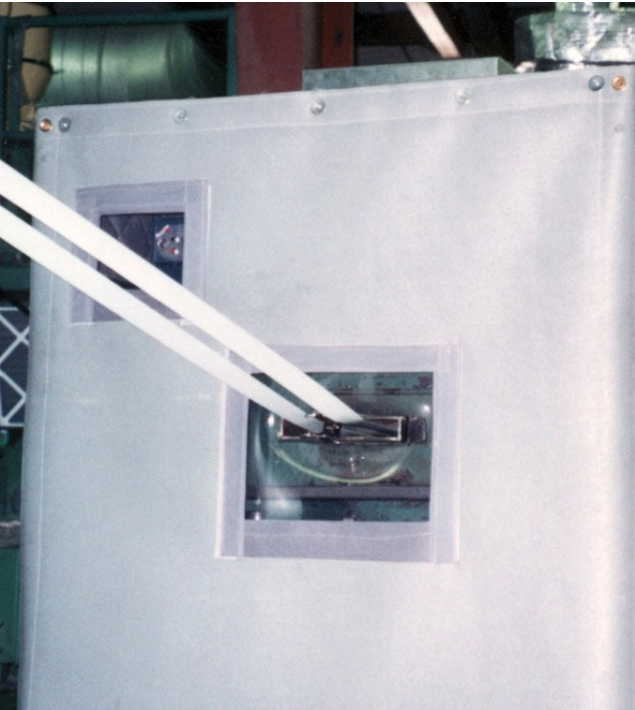

PRODUCT DATA:

Description	2 lb-psf non-reinforced loaded vinyl barrier
Nominal thickness	0.23 inches
Standard width	54" wide
Roll length	60' long
Weight	2.0 lb psf

ACOUSTICAL DATA:

Product	Sound Transmission Loss (dB)						STC
	125	250	500	1000	2000	4000	
OX-B20NR	16	22	26	32	35	40	31

ASTM E-90 & E 413

SPECIFICATIONS:

Specifications can be downloaded from our website <https://www.oeler.com/resources/datasheets/> or call us at (412) 884-3000.