



SPEC DATA SHEET # OXC-200

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

OXC-200


ACOUSTICAL CEILING TILES

Our acoustical ceiling tile products are designed to acoustically treat and soundproof interior ceiling spaces within. The OXC-200 Series Ceiling Tiles by Oeler Industries Inc. offer both excellent acoustics with customized options to enhance visual aesthetics.

Sound Quality Ceiling tiles are offered as both a sound absorbing as well as combination sound absorbing / sound blocking tile.

OXC-200 Ceiling Tiles have a 2 mm white pebble grain vinyl facing attached to a 1" or 2" thick rigid fiberglass board and have excellent sound absorption (NRC) ratings.

OXC-200B Ceiling Tiles take the standard OXC-200 tile and add a 1# per square foot foil backed vinyl noise to the backside of the tile for high sound absorption (NRC) and high sound blocking (STC) requirements.

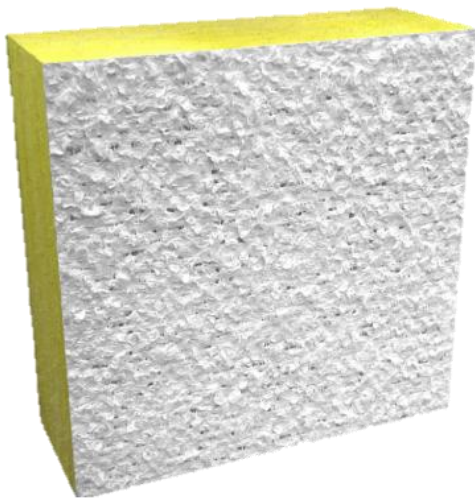

FEATURES:

- Standard size 2'x2' or 2'x4'
- Custom sizes available
- 1" or 2" thickness
- 2 mil white nubby cloth finish
- Excellent acoustical values
- Offered with a vinyl noise barrier for high STC requirements





Intelligent Acoustic Solutions

SPEC DATA SHEET # OXC-200



FINISH

White nubby cloth facing

ACOUSTICAL

NRC Rating

1" Thick ----- .85

2" Thick ----- 1.15

OXC-200B-----STC 26

SUBSTRATE

6-7# PCF rigid fiberglass core

*OXC-200B adds a vinyl noise barrier

EDGE DETAIL

Square

WEIGHTS

OXC-200 Tile .75 lbs/SqFt

OXC-200B Tile 1.75 lbs/SqFt

MOUNTING OPTIONS

Grid supplied by others

SPECIFICATIONS:

Specifications can be downloaded from our website

<https://www.oeler.com/resources/datasheets/> or call us at (412) 884-3000.