



SPEC DATA SHEET # OXC-300


4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

OXC-300

ACOUSTIC CEILING TILES

The acoustical OXC-300 Ceiling Tiles by Oeler Industries, Inc. have a white cloth facing. OXC-300 Ceiling Tiles are available in 1" or 2" thickness with standard sizes to fit a 2'x2' or 2'x4' lay in ceiling tile grid.

OXC-300B Ceiling Tiles have a #1 lbs/SqFt foil backed barrier for high STC and NRC requirements. OXC-300B Ceiling Tiles are available in 1 1/8" or 2 1/8" thickness with standard sizes to fit a 2'x2' or 2'x4' lay in ceiling tile grid.

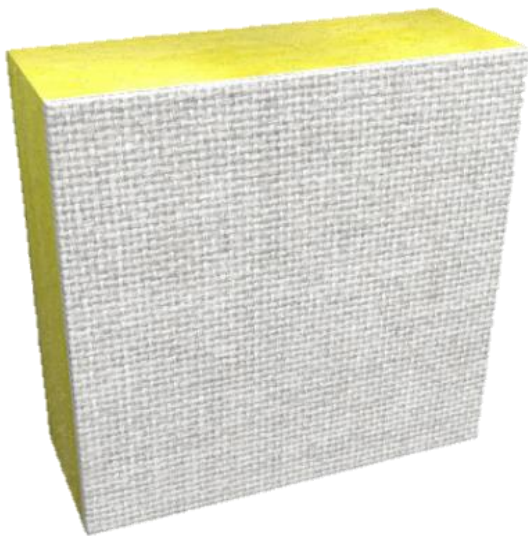

FEATURES:

- All components shall have a Class A fire rating per ASTM E-84
- 6-7# PCF rigid fiberglass core





Intelligent Acoustic Solutions

SPEC DATA SHEET # OXC-300

FINISHES:

Signature white cloth facing option of Guilford FR 701 Facing.



EDGE DETAIL:

Square

Standard

Reveal

Angled Reveal

WEIGHT:

OXC-300 and OXC-300B

2'x2' -6 lbs/ea

2'x4' -12 lbs/ea

1":	0.85
2":	1.15

STC Rating (OXC-300, OXC-300B)

1 1/8":	28
2 1/8":	30

SPECIFICATIONS:

Specifications can be downloaded from our website <https://www.oeler.com/resources/datasheets/>

or call us at (412) 884-3000.