




OX-SOFTSTEP SOFTSTEP

Oeler Industries, Inc. Oelex Softstep contains zero rubber so plasticize migration will not occur and is made entirely of polyurethane foam and cork. Oelex Softstep is age resistant for decades for durability under point loads and at only 3mm but will add excellent acoustic improvement to the floor assembly.

- Offers long term performance without collapse or bottoming out
- Suitable for both new construction & renovations
- Quick & easy installation
- Resistant to aging & deformation

SPEC DATA SHEET # OX-SOFTSTEP

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

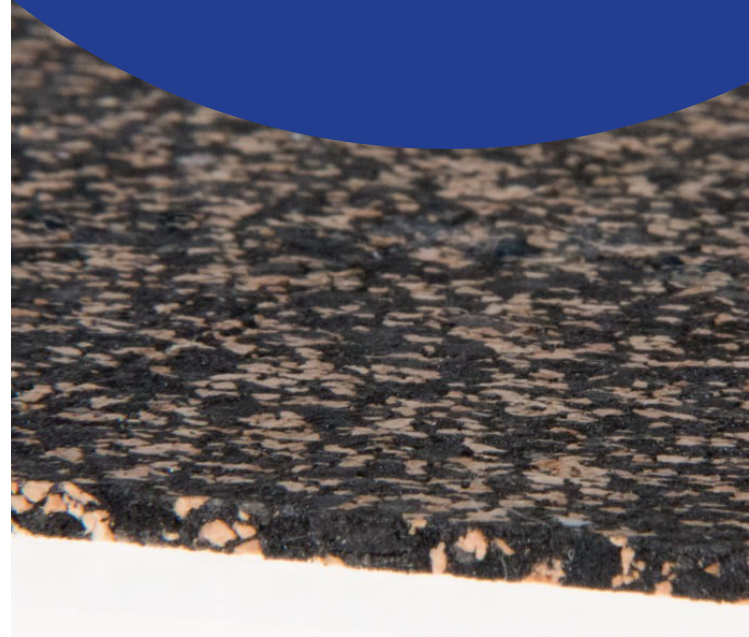

FEATURES:

- Sound reducing underlayment for floated wood laminate and engineered wood floor systems
- Excellent for wood construction, will add additional sound transmission (STC) due to weight of product
- Economically priced, available in 4'x25' & 4'x50' rolls
- Environmentally friendly, made from recycled materials, using 92% post-consumer recycled content
- Can be installed as a free-floating or glue-down system





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-SOFTSTEP



APPLICATIONS:

Specifically designed for use under both dry back and glue down LVP/LVT, sheet vinyl, carpet and carpet tile flooring.

SPECIFICATIONS:

Material: Polyurethane foam/ cork

Roll Size: 39" x 65' x 6" (213 sq ft roll)

Thickness: 3mm

Weight Per Roll: 65 lbs.

Density: 45 lbs./ cubic ft

Hardness A Shore Durometer: 54-64

Temperature Resistance: -40 - 110c

Sound Reduction: ΔIIC 22

ACOUSTIC PERFORMANCE:

Thickness	Wood Frame	6" Concrete
3mm	IIC 57	Δ21
6mm	IIC 57	Δ22
12mm	IIC57	Δ23

Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007097, and ASTM E2179-03.

