



## SPEC DATA SHEET # OX-210

4700 Clairton Blvd., Pittsburgh, PA 15236  
Tel: (412) 884-3000 • Fax: (412) 884-3300  
www.oeler.com • sales@oeler.com


# OX-210

## HIGH-IMPACT WALL PANELS

Oelex Acoustical Wall Panels by Oeler Industries, Inc. are the solution for areas that require noise reduction and are available in a variety of models for various applications. The OX-210 Wall Panel is manufactured to the highest standards and is specifically designed as an impact resistance absorber panel that offers both excellent absorption and high durability. Application for the OX-210 panels includes schools, gymnasiums, corridors, offices, airports, churches, restaurants, and any area where acoustics and impact resistance is required.

The OX-210 High-Impact Wall Panels are ideal for environments that combine the need for superior acoustical performance and resilience to high traffic areas. The OX-210 Panels are constructed using a 6-7# rigid fiberglass absorber core laminated to 16#-20# PCF high-impact underlayment. The edges are chemically hardened and available in 4 edge profiles. OX-210 panels are available in 5/8", 1", 1 5/8" and 2 1/8" thickness. These panels are available in standard or custom sizes (up to a maximum of 5' x 10') with custom, designer or C.O.M. fabric available.

OX-210 panels are easily installed on walls or ceilings using mechanical clips, adhesive hook & loop. Consult with factory on the best-suited mounting for your specific application.

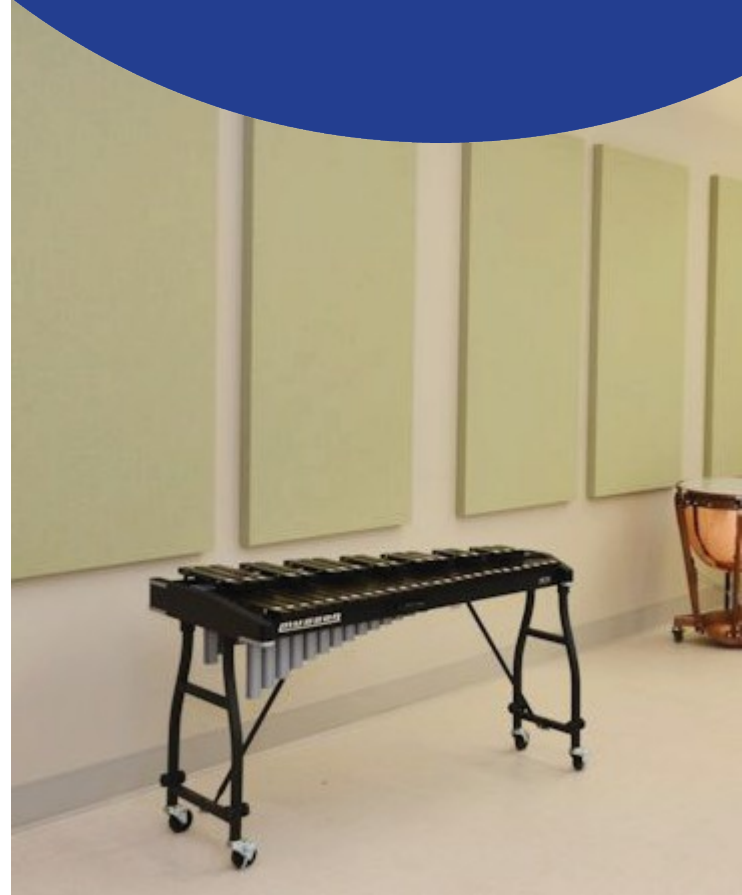

### FEATURES:

- High-impact, abuse-resistant
- Excellent sound reduction
- Class A fire rated
- Standard, or designer or C.O.M fabric





Intelligent Acoustic Solutions

**SPEC DATA SHEET # OX-210**



**FINISHES:**

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Carnegie and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

**ACOUSTICAL DATA:  
NRC Rating**

5/8":	.60
1 1/8":	.95
2 1/8":	1.05

**SPECIFICATIONS:**

Specifications can be downloaded from our website [www.oeler.com/specs.html](http://www.oeler.com/specs.html) or call us at (412) 884-3000.

**MOUNTING OPTIONS:**



2-PART  
MECHANICAL CLIPS



CLIP & VELCRO



IMPALING CLIP

**ADDITIONAL DETAILS:**

Available in a variety of edges as well as high-impact or reflective options.