



SPEC DATA SHEET # OX-116

4700 Clairton Blvd., Pittsburgh, PA 15236
Tel: (412) 884-3000 • Fax: (412) 884-3300
www.oeler.com • sales@oeler.com

PET-CLD CEILING CLOUDS

The PET-CLD offered by Oeler Industries, Inc. are acoustically superior recycled PET felt surface ceiling clouds. They are perfect for the reduction of sound in ceiling areas. They are suspended horizontally with aircraft cables or threaded rod attachments. Are available in circles, squares and 34 different colors.

APPLICATIONS:

- Libraries
- Restaurants
- Club Rooms
- Ballrooms
- School Auditoriums



FEATURES:


- Excellent acoustical performance
- High-quality, economical, multi-purpose panels
- Class A fire rated
- Various mounting options
- Custom sizes and shapes
- Easy Install





Intelligent Acoustic Solutions

SPEC DATA SHEET # OX-200

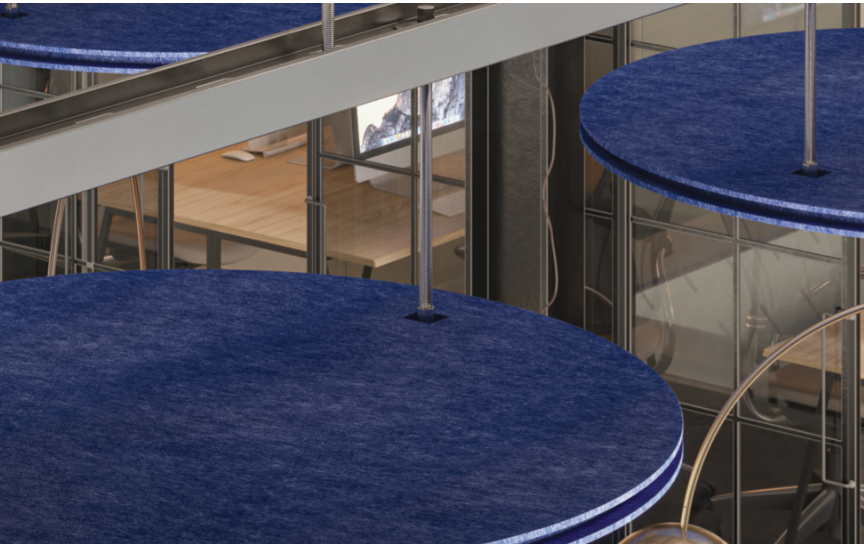

Ceiling clouds are available in 2-3/4" thickness with maximum sizes up to 47" diameter circle or 47" x 47" square

Fire Rating:

All components shall have a Class A fire rating per ASTM E-84

SUBSTRATE: 100% Polyethylene Terephthalate (PET)

MOUNTING: Aircraft cable or threaded rod attachments

FINISHES: 34 Finishes available

ACOUSTICAL DATA:

FREQUENCY (Hz)	125	250	500	1000	2000	4000	SABINS
2-3/4" THICKNESS	8.03	11.24	16.21	23.43	27.08	29.63	
FREQUENCY(Hz)	125	250	500	1000	2000	4000	NRC
2-3/4" THICKNESS	.53	.74	1.06	1.54	1.77	1.94	1.30

Environmental Factors:

- 100% Recyclable
- Low VOC Emissions
- ASTM – D5116
- LEED- MRc4